


## **SUBMITTAL DATA SHEET**

#### **Concentric Vent Kits**


# **Typical Roof Install**

Maintain 12" minimum clearance above highest anticipated snow level. maximum of 24" above roof.

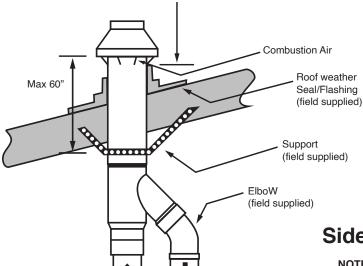

# **Sidewall Termination Details**

**NOTE:** Securing strap must be field installed to prevent movement to termination kit in side wall

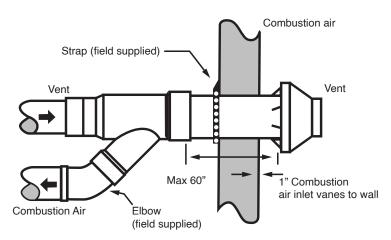

### Features:

Vent

- Cut only one hole instead of traditionally cutting two holes through roof or side wall for exhaust and intake
  pipes to complete installation.
- The preferred vertical roof termination which is less susceptible to damage than horizontal sidewall termination and reduces the chance of intaking contaminants and also has less visible vent vapors.
- The Concentric Vent reduces the allowable intake/vent piping length by 5 feet from that listed in the basic heater installation instructions.

NOTE: Refer to installation instructions provided with each unit. Install in accordance with local plumbing code. Complied with UL 1738.