




Heavy Duty No-Hub Couplings

PASCO No-Hub couplings utilize the unique “High Efficiency” (HE) clamp specifically developed for no-hub installations. This HE clamp offers the most band load in the industry when 80 lbs. of installation torque is applied.

- 304 Stainless Steel
- Comply with ASTM C-564 and ASTM C-1277
- Conform to CISPI 310
- IAPMO File 4060
- Additional clamps provide better sealing and load distribution
- 5/16” Hex head screws

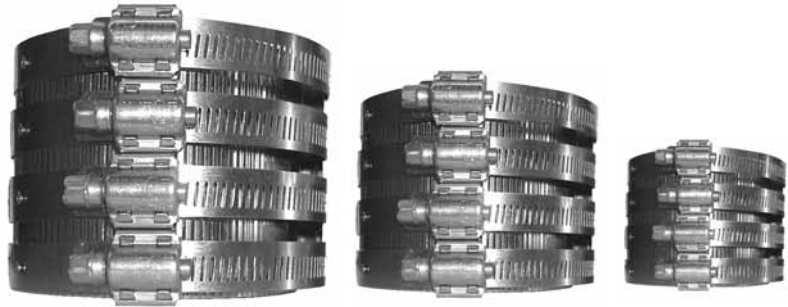

PART NUMBER	SIZE	CASE QTY.
PNHC-2HD	2”	75
PNHC-3HD	3”	48
PNHC-4HD	4”	48
PNHC-5HD	5”	15
PNHC-6HD	6”	15
PNHC-8HD	8”	15
PNHC-10HD	10”	12
PNHC-12HD	12”	12

No-Hub Couplings

PASCO No-Hub couplings utilize the unique “High Efficiency” (HE) clamp specifically developed for no-hub installations. This HE clamp offers the most band load in the industry when 60 lbs. of installation torque is applied.

- AISI 301 stainless steel band and shield.
- AISI 305 stainless steel screw
- Gaskets conform to ASTM C564
- Complies with standards:
- IAMPO 35-98
- CSA B70-M91
- CSA B602-M90
- CISPI 310-95



PART NUMBER	SIZE	CASE QTY.
PNHC-1.5	1-1/2”	100
PNHC-2	2”	100
PNHC-21.5	2” x 1-1/2”	100
PNHC-3	3”	100
PNHC-32	3” x 2”	100
PNHC-4	4”	100
PNHC-42	4” x 2”	50

PART NUMBER	SIZE	CASE QTY.
PNHC-43	4” x 3”	50
PNHC-5	5”	30
PNHC-6	6”	30
PNHC-8	8”	20
PNHC-10	10”	10
PNHC-12	12”	12