



## Sump Pump Check Valves

- Flapper is nested in place to improve durability and longer life.
- Gasket-less design used on valve body.
- Injection molded ABS valve body is extremely tough and durable.
- Internal valve chamber uses a hydrodynamic design to reduce water turbulence and reduce noise.
- Silencer check valves completely eliminate hammering noises associated with pump cycling.
- Vertical or Horizontal

### Rubber Hose Coupling



- Valves come with all mounting hardware.

#### Standard


| PART NO. | HOSE SIZE       | LENGTH |
|----------|-----------------|--------|
| 29150    | 1-1/2"          | 7-3/4" |
| 29126    | 1-1/4" x 1-1/2" | 9-1/4" |

#### Full Flow

| PART NO. | HOSE SIZE | LENGTH |
|----------|-----------|--------|
| 29120    | 2"        | 9-3/4" |

#### "Silencer"

| PART NO. | HOSE SIZE | LENGTH  |
|----------|-----------|---------|
| 29121    | 1-1/2"    | 12"     |
| 29122    | 2"        | 12-3/4" |

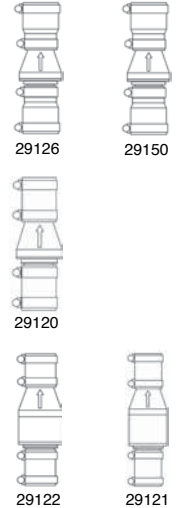


### True Union Swing



- True Union coupling for easy swing-out during service/inspection
- Slip x Slip ends • O-Ring seals
- Ball valve/check valve combinations

#### "Silencer" Ball Valve / Check Combo

| PART NO. | HOSE SIZE | LENGTH  |
|----------|-----------|---------|
| 29137    | 1-1/2"    | 14-1/8" |
| 29138    | 2"        | 16-1/2" |



### Compression Swing



- Fittings on both ends of valve for easy installation
- Ball valve/check valve combinations available
- No gluing required
- Heavy duty design

#### Compression

| PART NO. | PIPE SIZE | LENGTH |
|----------|-----------|--------|
| 29139    | 2"        | 9-1/4" |